



VGA + RS-232 UTP EXTENDER

VGA + RS-232 UTP EXTENDER (BOX STYLE AND WALL PLATE STYLE)





- Extend VGA + RS232 signal using ONE UTP Cable.
- High resolution up to 1920x1440 @60 Hz.
- Distance up to 500 ft. apart or 1000 ft. using Belden Skew-Free cable.
- Work with monitors, projectors, HDTV, and flat panels.
- RS232 works with scanner and touch screen control.



Metal Wall Plate Style Set (R02-EXT-RS-FP)

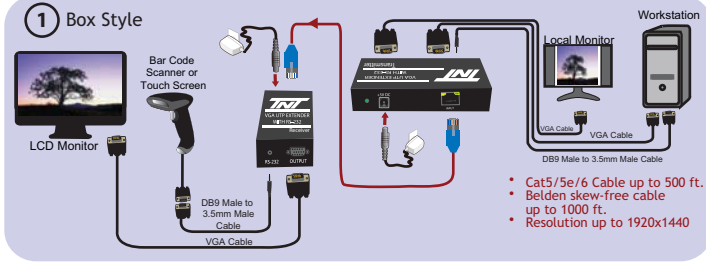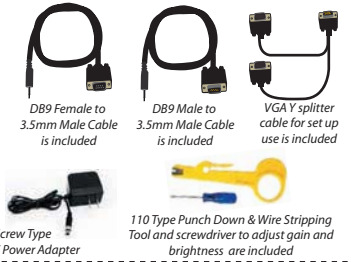

Box Style Set (R02-EXT-C5E-RS)

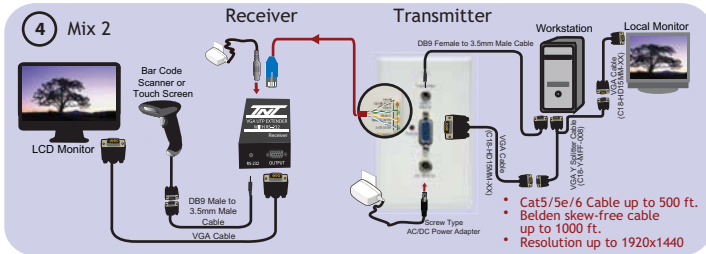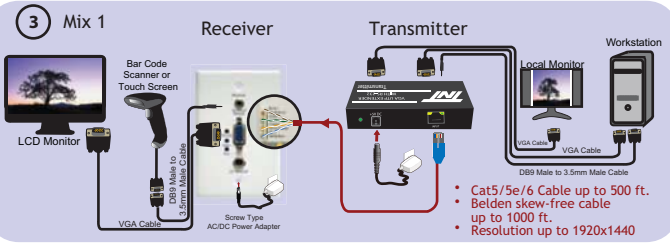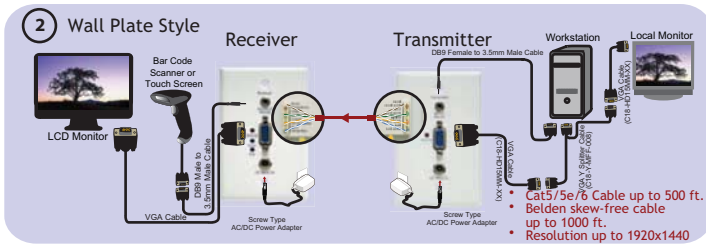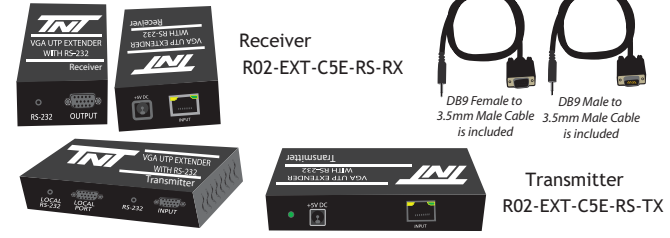

SOLD AS SET (Transmitter & Receiver)

PART NUMBER	DESCRIPTION	1-4	5-9	10+
R02-EXT-C5E-RS	VGA+RS-232 UTP Extender - Box Style	\$126.40	122.45	118.50
R02-EXT-RS-FP	VGA+RS-232 UTP Extender - Wall Plate Style	121.60	117.80	114.00

SOLD AS INDIVIDUAL UNIT

PART NUMBER	DESCRIPTION	1-4	5-9	10+
R02-EXT-C5E-RS-RX	VGA+RS232 Extender, Box, Receiver	\$73.60	71.30	69.00
R02-EXT-C5E-RS-TX	VGA+RS232 Extender, Box, Transmitter	62.40	60.45	58.50
R02-EXT-RS-TX-FP	VGA+RS232 Extender, Wallplate, Transmitter	62.40	60.45	58.50
R02-EXT-RS-RX-FP	VGA+RS232 Extender, Wallplate, Receiver	68.80	66.65	64.50

VGA OVER 4 FIBER EXTENDER


VGA FIBER EXTENDER

- Support highest resolution of 1600x1200@60Hz up to 500 meters (1,640 feet) using 2 pairs of DLC or 4LC 50/125 Multi-Mode Fiber Patch Cords.
- Transmitter's image adjustment in horizontal and vertical way, adjustment of image's sampling clock phase and frequency, adjustment of image's brightness and contrast, adjustment and preservation of all adjustment parameter in all kinds of resolutions.
- Support EDID read of display device and keeps in the system.
- Support the signal input indicates
- Support the optic output indicates
- The input supports the window, easy to use



SOLD AS SET (Transmitter & Receiver)


PART NUMBER	DESCRIPTION	1-4	5-9	10+
R02-EXT-4FB	VGA Fiber Extender	CALL FOR PRICE		

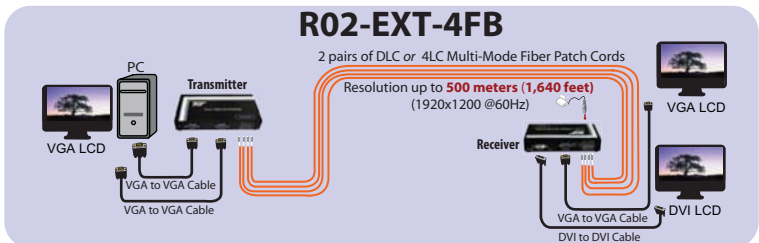

VGA IN, VGA OUT SPLITTER

VGA SPLITTER

- Connect computers with VGA graphics up to 4 VGA (depend on the unit) compatible monitors or projectors.
- Allow up to 4 VGA display monitors to be connected at the same time to the same video source.
- Simultaneously display at local and remote locations.
- Maintain highest video resolution up to 1920x1200
- Install in seconds
- VGA Amplifier Bandwidth: 250 MHz.

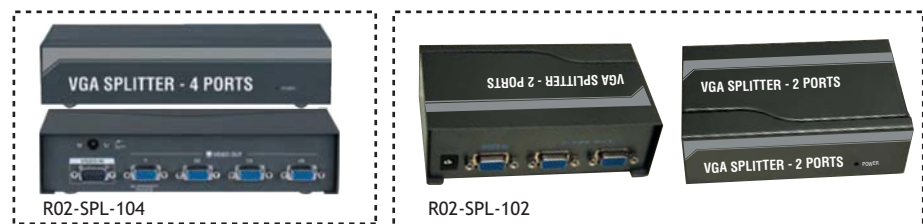

PART NUMBER	DESCRIPTION	1-4	5-9	10+
R02-SPL-102	1 VGA In, 2 VGA Out Splitter	\$41.60	40.30	39.00
R02-SPL-104	1 VGA In, 4 VGA Out Splitter	44.80	43.40	42.00

