

SVGA & VGA CABLES

CMP PLENUM SVGA CABLE

- 28 AWG, spiral shielded coax, 75 Ohm UL1354, aluminum foil and braid shielded with drain wire.
- HD D-sub 15-pin Male, solder type, gold/silver flash contacts and thumb screws molded.
- Hoods molded black, CMP PVC.



ORDER CODE	DESCRIPTION	PRICE
C18P-HD15MM-50	CMP Plenum HD15 Male to Male, 50 feet	PLEASE CALL FOR PRICE
C18P-HD15MM-75	CMP Plenum HD15 Male to Male, 75 feet	
C18P-HD15MM-100	CMP Plenum HD15 Male to Male, 100 feet	
C18P-HD15MM,MF,FF-XX	CMP Plenum HD15 Male/Female, Custom Length	

ENHANCED VGA MONITOR CABLE

- Extends cable range to up to 100 feet.
- 3 mini coaxial conductors, 2 pairs of individual shielded conductors under one jacket - extends signal integrity.



ORDER CODE	DESCRIPTION	1-24	25-49	50+
C18-HD15MM-03	Male/Male, 3 feet	\$4.58	4.37	4.06
C18-HD15MM-06	Male/Male, 6 feet	6.69	6.38	5.93
C18-HD15MM-10	Male/Male, 10 feet	9.68	9.24	8.58
C18-HD15MM-15	Male/Male, 15 feet	13.20	12.60	11.70
C18-HD15MM-25	Male/Male, 25 feet	20.24	19.32	17.94
C18-HD15MM-50	Male/Male, 50 feet	36.96	35.28	32.76
C18-HD15MM-75	Male/Male, 75 feet	54.56	52.08	48.36
C18-HD15MM-100	Male/Male, 100 feet	70.40	67.20	62.40
C18-HD15MF-03	Male/Female, 3 feet	4.58	4.37	4.06
C18-HD15MF-06	Male/Female, 6 feet	6.69	6.38	5.93
C18-HD15MF-10	Male/Female, 10 feet	9.68	9.24	8.58
C18-HD15MF-15	Male/Female, 15 feet	13.20	12.60	11.70
C18-HD15MF-25	Male/Female, 25 feet	20.24	19.32	17.94
C18-HD15MF-50	Male/Female, 50 feet	36.96	35.28	32.76
C18-HD15MF-75	Male/Female, 75 feet	54.56	52.08	48.36
C18-HD15MF-100	Male/Female, 100 feet	70.40	67.20	62.40

VIDEO Y CABLE & ANGLE SVGA CABLE

- SVGA cables : 90° male, left or right exit, to 180° male.
- Video Y cable : Splitter cable, HD15 male to 2 x HD15 female, 8 inches.



ORDER CODE	DESCRIPTION	1-24	25-49	50+
C18-HD15MM-06L	SVGA Cable, Left Exit, 6 feet	\$12.76	12.18	11.31
C18-HD15MM-10L	SVGA Cable, Left Exit, 10 feet	17.60	16.80	15.60
C18-HD15MM-06R	SVGA Cable, Right Exit, 6 feet	12.76	12.18	11.31
C18-HD15MM-10R	SVGA Cable, Right Exit, 10 feet	17.60	16.80	15.60
C18-Y-MFF-008	VGA Y Splitter Cable, 8 inches	4.05	3.86	3.59



SVGA + 3.5MM AUDIO MALE TO MALE

- VGA Connectors: HD15 Male to HD15 Male
- Audio Connectors: 3.5mm Male to 3.5mm Male

ORDER CODE	DESCRIPTION	1-24	25-49	50+
C18-HD15M-35A-03	SVGA+3.5mm Audio Male to Male, 3 feet	\$5.21	4.67	4.62
C18-HD15M-35A-06	SVGA+3.5mm Audio Male to Male, 6 feet	7.30	6.97	6.47
C18-HD15M-35A-10	SVGA+3.5mm Audio Male to Male, 10 feet	10.12	9.66	8.97
C18-HD15M-35A-15	SVGA+3.5mm Audio Male to Male, 15 feet	13.64	13.02	12.09

IEEE 1394A FIREWIRE

IEEE 1394A FIREWIRE - 6 POSITION CONNECTOR RELATED CABLES


- Provides high performance IEEE bus interface between PC and Peripheral and consumer electronic products.
- Data transfer rate: between 100Mbps and 400Mbps.
- Plug-and-play and hot-swapping capabilities.
- Maximum chaining devices: 67.



ORDER CODE	DESCRIPTION	1-24	25-49	50+
U06-4P4P-06	4 pin to 4 pin, 6 feet	\$4.58	4.37	4.06
U06-4P4P-10	4 pin to 4 pin, 10 feet	7.39	7.06	6.55
U06-6P4P-03	6 pin to 4 pin, 3 feet	3.52	3.36	3.12
U06-6P4P-06	6 pin to 4 pin, 6 feet	4.58	4.37	4.06
U06-6P4P-10	6 pin to 4 pin, 10 feet	7.39	7.06	6.55
U06-6P4P-15	6 pin to 4 pin, 15 feet	10.03	9.58	8.89
U06-6P6P-03	6 pin to 6 pin, 3 feet	4.22	4.03	3.74
U06-6P6P-06	6 pin to 6 pin, 6 feet	5.10	4.87	4.52
U06-6P6P-10	6 pin to 6 pin, 10 feet	7.39	7.06	6.55
U06-6P6P-15	6 pin to 6 pin, 15 feet	10.03	9.58	8.89


BNC VIDEO CABLES

HIGH DENSITY DB-15 VGA TO 5 BNC CABLE




ORDER CODE	DESCRIPTION	1-24	25-49	50+
E05-HD15M-5BNCM-1	HD DB-15 Male to 5 Male BNC, 1 foot	\$14.08	13.44	12.48
E05-HD15M-5BNCF-1	HD DB-15 Male to 5 Female BNC, 1 foot	14.08	13.44	12.48
E05-HD15F-5BNCM-1	HD DB-15 Female to 5 Male BNC, 1 foot	14.08	13.44	12.48
E05-HD15F-5BNCF-1	HD DB-15 Female to 5 Female BNC, 1 foot	14.08	13.44	12.48
E06-HD15M-5BNCM-6	HD DB-15 Male to 5 Male BNC, 6 feet with Ferrie Cord	15.84	15.12	14.04
E06-HD15M-5BNCM-10	HD DB-15 Male to 5 Male BNC, 10 feet with Ferrie Cord	21.12	20.16	18.72

DB-15 TO 5 BNC CABLE (FOR MAC)



ORDER CODE	DESCRIPTION	1-24	25-49	50+
E07-D15M-5BNCM-6	DB-15 Male to 5 BNC Male, 6 feet	\$19.36	18.48	17.16

4 TO 4, OR 5 TO 5 BNC MALE CABLE




ORDER CODE	DESCRIPTION	1-24	25-49	50+
E07-4BNCM-4BNCM-06	4 BNC Male to 4 BNC Male, 6 feet	\$24.64	23.52	21.84
E07-4BNCM-4BNCM-10	4 BNC Male to 4 BNC Male, 10 feet	28.16	26.88	24.96
E07-4BNCM-4BNCM-25	4 BNC Male to 4 BNC Male, 25 feet	45.76	43.68	40.56
E07-5BNCM-5BNCM-06	5 BNC Male to 5 BNC Male, 6 feet	28.16	26.88	24.96
E07-5BNCM-5BNCM-10	5 BNC Male to 5 BNC Male, 10 feet	31.68	30.24	28.08
E07-5BNCM-5BNCM-25	5 BNC Male to 5 BNC Male, 25 feet	51.04	48.72	45.24

IEEE 1394B FIREWIRE

IEEE 1394B FIREWIRE - 9 POSITION CONNECTOR RELATED CABLES

- Connectors: 9-pin Male to 4-pin Male / 6-pin Male / 9-pin Male.
- Supports data transfer rates up to 400 Mbps.
- Compatible: Connectors FireWire 800 devices to legacy 1394a ports.
- IEEE Standard 1394b compliant.
- Plug-and-play operation.

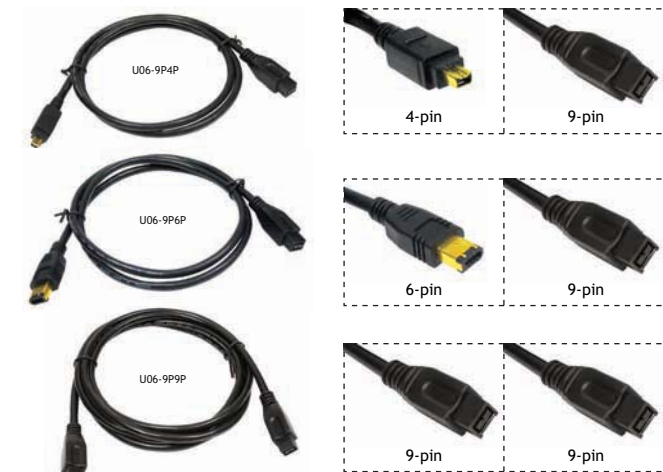

ORDER CODE	DESCRIPTION	1-24	25-49	50+
U06-9P4P-06	1394 FireWire, 9-pin Male to 4-pin Male, 6 ft	\$8.36	7.98	7.41
U06-9P4P-10	1394 FireWire, 9-pin Male to 4-pin Male, 10 ft	10.74	10.25	9.52
U06-9P6P-06	1394 FireWire, 9-pin Male to 6-pin Male, 6 ft	7.13	6.80	6.32
U06-9P6P-10	1394 FireWire, 9-pin Male to 6-pin Male, 10 ft	8.80	8.40	7.80
U06-9P9P-06	1394 FireWire, 9-pin Male to 9-pin Male, 6 ft	9.77	9.32	8.66
U06-9P9P-10	1394 FireWire, 9-pin Male to 9-pin Male, 10 ft	11.44	10.92	10.14